
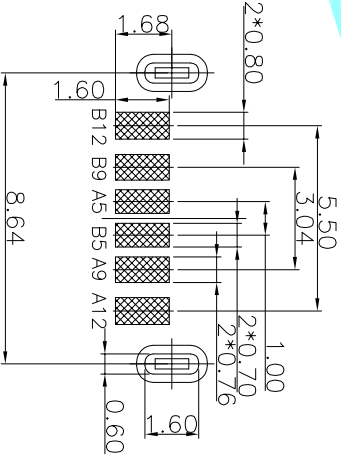
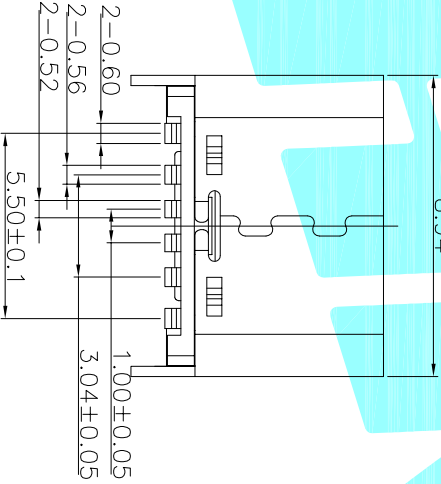

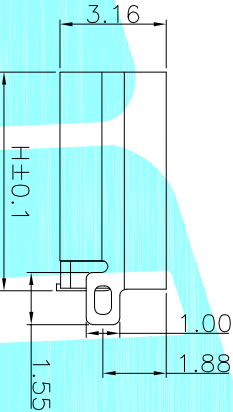


A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

PART NO	H
TYPE-C-31-D-03	5.5
TYPE-C-31-D-04	6.5
TYPE-C-31-D-05	6.8

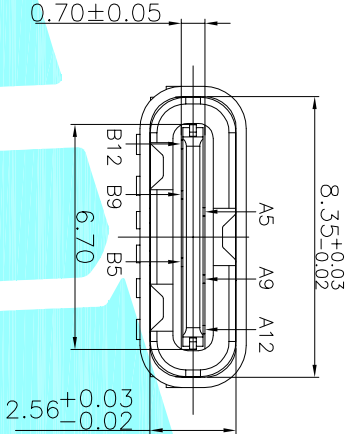

- NOTES:
SPECIFICATION:
1. CURRENT RATING: 3A MAX
 2. VOLTAGE: 20V
 3. TEMPERATURE RANGE: -20 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES

ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING
③	Shell	—	1	STAINLESS STEEL	Ni Plated
②	Contact	—	6	COPPER ALLOY	Au Plated
①	Housing	—	1	LCP	Black

APPROVALS	DATE	 ELECTRONICS CO.,LTD
DRAWN	JIANKUN.LU 2020.07.01	

							CHECKED		TITLE:	USB CONNECTOR					
							APPROVALS		PART NO.						
	A		NEW					30~以上 10~30 ~5	#0.30 #0.25 #0.15	ANGLE	UNIT: mm	SCALE: 1:1	PROD.		SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE				DRAWING NO.				