

SPECIFICATIONS





1. RATING: DC30V 1.0A
2. MECHANICAL LIFE: 10,000 CYCLES.

Recommended PCB Layout


③	Base	—	1	NYLON		
②	Terminal	—	4	Phosphor Bronze	Ag Plated	
①	Housing	—	1	SPCC	Sn Plated	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	ELECTRONICS CO.,LTD			
DRAWN	xu qi feng	2014/11/17				
CHECKED						
APPROVALS						
TOLERANCES ARE		30~φ以上 ±0.30	ANGLE	TITLE: USB CONNECTOR		
		10~30 ±0.25		PART NO. U-A-24DD-Y-5		
		5~10 ±0.20	±2'	SCALE: 1:1		
		~5 ±0.15		PROJ: 1 OF 1		
				DRAWING NO.		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

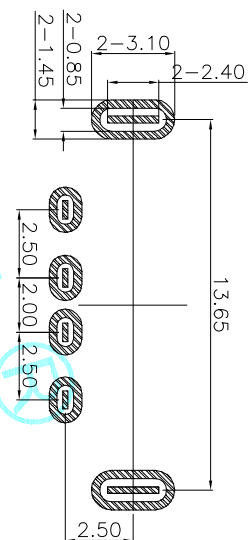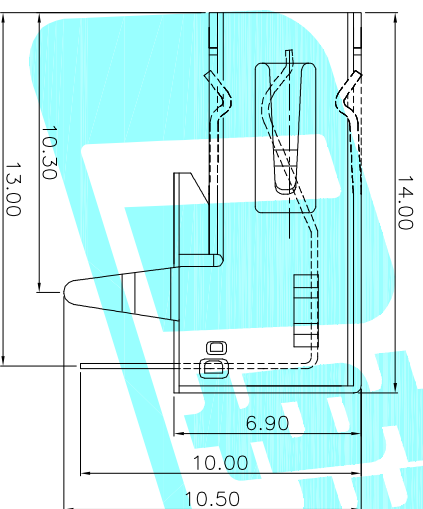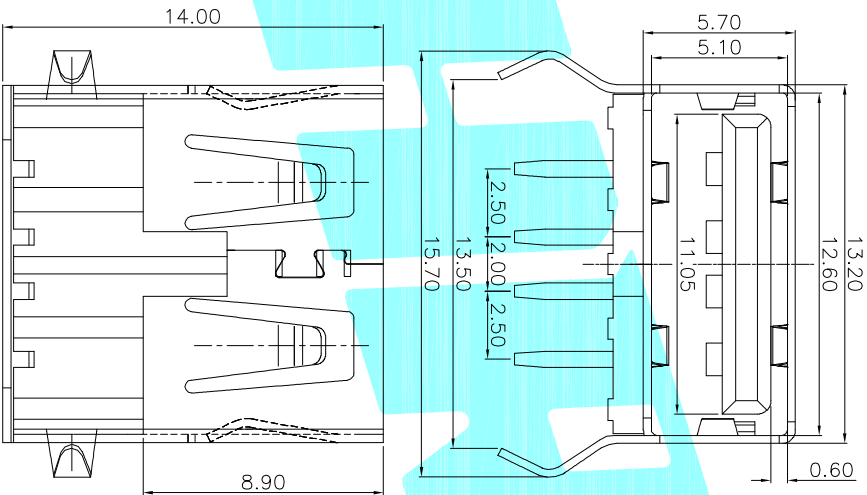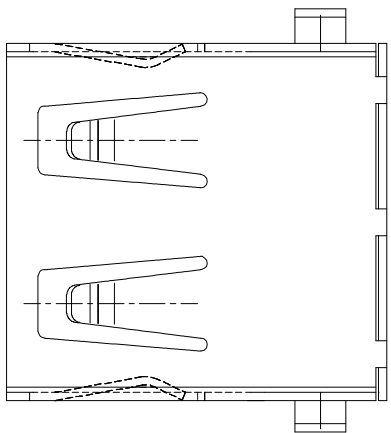

Recommended PCB Layout

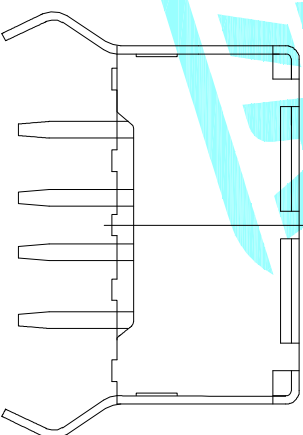

SPECIFICATIONS

1.RATING: DC30V 1.0A
2.MECHANICAL LIFE: 10,000 CYCLES.

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
③	Base	—	1	NYLON	White
②	Terminal	—	4	Phosphor Bronze	Ag Plated
①	Housing	—	1	SPCC/Phosphor Bronze	Ni Plated

APPROVALS	DATE	TITLE:
DRAWN JIANKUN.LIU	2018.08.01	USB CONNECTOR
CHECKED		
APPROVALS		

APPROVALS	PART NO.	SCALE:	PROJ:
	U-A-24DD-W-5	1:1	①
TOLERANCES ARE		UNIT: mm	DRAWING NO.
30~Ø以上 10~30 5~10 ~5	±0.30 ±0.25 ±0.20 ±0.15	ANGLE ±2°	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			