
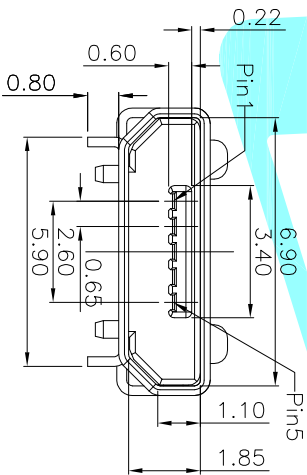
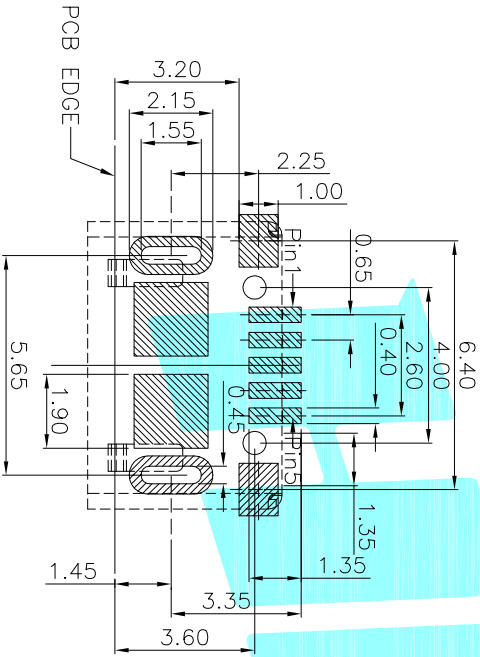

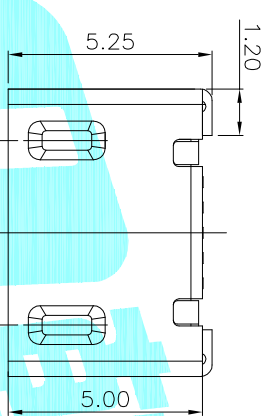

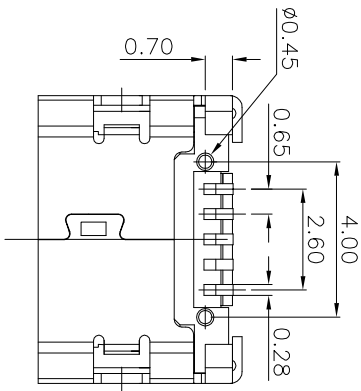


SPECIFICATIONS

- 1.RATING: DC30V 1.0A
- 2.MECHANICAL LIFE: 10,000 CYCLES.
- 3.PACKAGING: 1000PCS/REEL

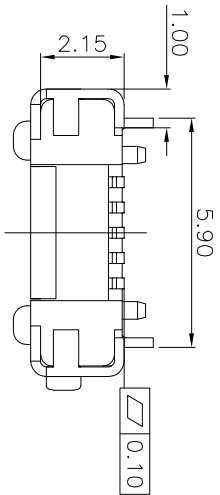

Recommended PCB Layout

③	Shell	—	1	Phosphor Bronze	Sn Plated	—
②	Contact	—	5	Phosphor Bronze	Au Plated	—
①	Housing	—	1	LCP	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	TITLE: USB CONNECTOR			
DRAWN	JKUN.LU	2014/9/29	ELECTRONICS CO.,LTD			
CHECKED						
APPROVALS			PART NO. U-F-M5DS-W-8			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:	SHEET 1 OF 1
	A		NEW				30~0.15 10~0.30 5~0.10 ~5	±0.30 ±0.25 ±0.20 ±0.15				