
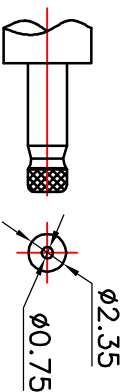


P.C.B LAYOUT(Copper-side view)

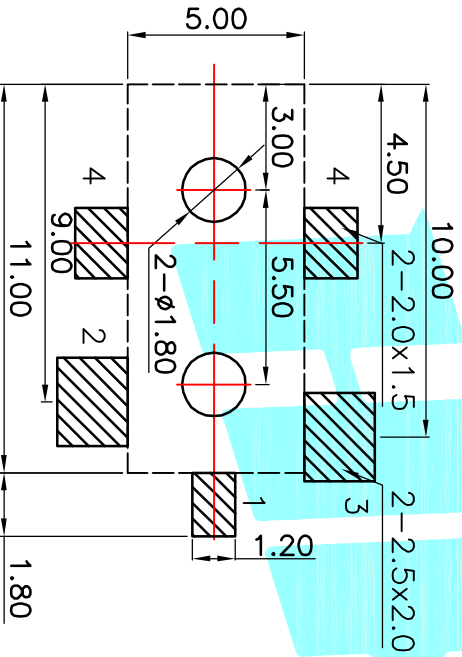

DC MATE PLUG

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

②	Terminal	5	Phosphor bronze	Au Plating		
①	Housing	1	Nylon	Black		
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				

DRAWN J.X.Zhang 2013/11/11

TITLE: PHONE JACKES

CHECKED

PART NO. DC-011C

APPROVALS		SCALE: 1:1		PROJ. SHEET 1 OF 1	
TOLERANCES ARE		±0.30	±0.20	±0.15	±0.10
30°±0.1°	10°~30°	±0.10	±0.15	±0.10	±0.10
5°~10°	~5	±0.10	±0.10	±0.10	±0.10
DRAWING NO.		SCALE: 1:1		SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			



ELECTRONICS CO.,LTD