



Model No.	1	2
PIN	φ1.0	φ1.3

P.C.B LAYOUT(Copper-side view)

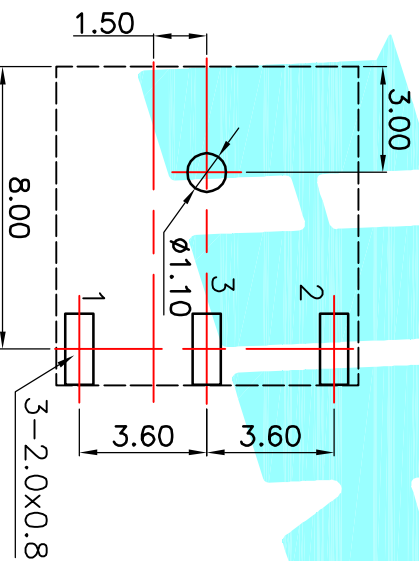

DC MATE PLUG

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

② Terminal	3	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11	ELECTRONICS CO.,LTD			
CHECKED			PHONE JACKS			
APPROVALS			PART NO.	DC-006		
TOLERANCES ARE	30 ^{±0.15}	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ.
	10 ^{±0.20}	±0.20		DRAWING NO.		SHEET 1 OF 1
	5 ^{±0.10}	±0.10	±Z			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			



ELECTRONICS CO.,LTD

PHONE JACKS

PART NO. DC-006

SCALE: 1:1

SHEET 1 OF 1