


P.C.B LAYOUT(copper-side view)

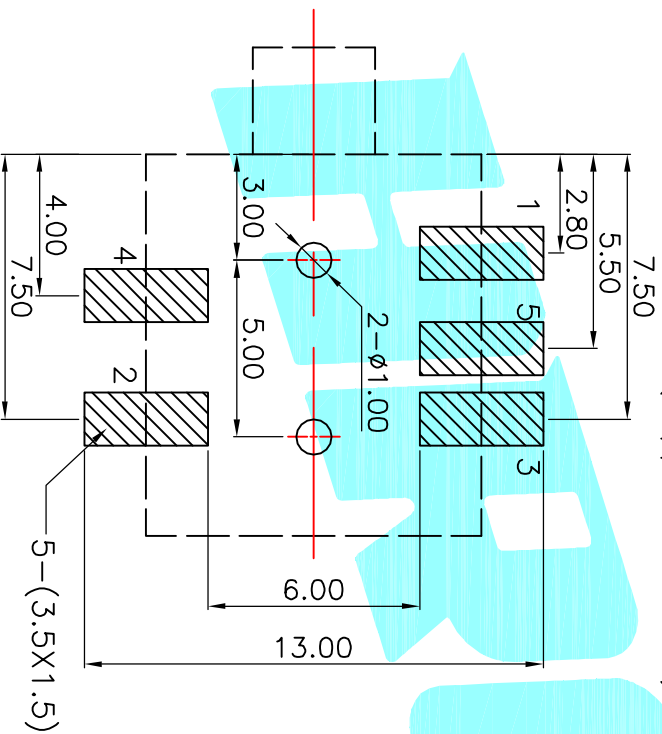

L=12.0	PJ-201-A	PJ-201-B
L=11.0	PJ-201-C	PJ-201-D
Schematic		
L=12.0	PJ-201-E	PJ-201-F
L=11.0	PJ-201-G	PJ-201-H
Schematic		

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3~20N  
 Operating Life:5,000cycles

②	Terminal	5	Phosphor bronze	Au Plating		
①	Housing	1	Nylon	Black		
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK

DRAWN	J.X.Zhang	DATE	2013/11/11	TITLE:	PHONE JACKES
CHECKED				PART NO.	PJ-201
APPROVALS				SCALE:	1:1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE: 30 <sup>±0.15</sup> 10 <sup>±0.20</sup> 5 <sup>±0.10</sup> ±0.10 ANGLE ±2° UNIT: mm SCALE: 1:1 PROJ: SHEET 1 OF 1						



ELECTRONICS CO.,LTD