


P.C.B Layout (copper-sided view)

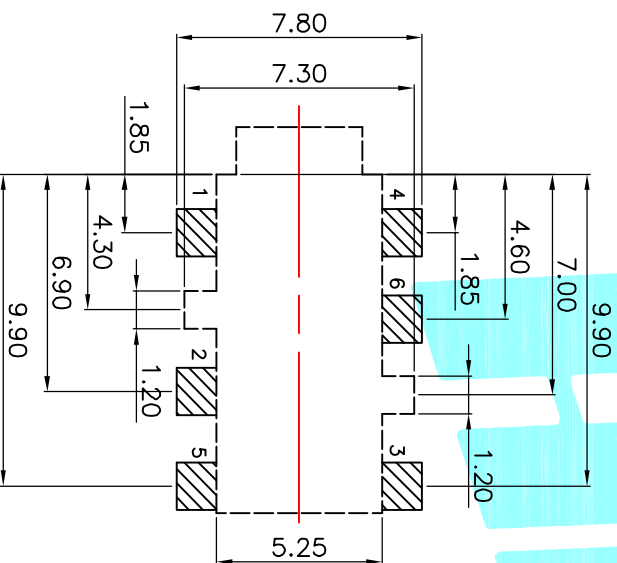

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

Model NO	PJ-258-A	PJ-258-B	PJ-258-C
Schematic			
Model NO	PJ-258-D	PJ-258-E	
Schematic			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHECK.	APPRO.																																												
	A		NEW																																														
<table border="1"> <tr> <td>② Terminal</td> <td>6</td> <td>Phosphor bronze</td> <td>Au Plating</td> </tr> <tr> <td>① Housing</td> <td>1</td> <td>Nylon</td> <td>Black</td> </tr> <tr> <td>ITEM PART NAME</td> <td>TER'NO. QTY.</td> <td>MATERIAL</td> <td>FINISHING</td> </tr> <tr> <td colspan="2">APPROVALS</td> <td>DATE</td> <td>REMARK</td> </tr> <tr> <td colspan="2">DRAWN J.X.Zhang</td> <td>2013/11/11</td> <td></td> </tr> <tr> <td colspan="2">CHECKED</td> <td>TITLE: PHONE JACKES</td> <td></td> </tr> <tr> <td colspan="2">APPROVALS</td> <td>PART NO. PJ-258</td> <td></td> </tr> <tr> <td colspan="2">TOLERANCES ARE</td> <td>SCALE: 1:1</td> <td>PROJ-4</td> </tr> <tr> <td>10~30</td> <td>±0.30</td> <td>ANGLE</td> <td></td> </tr> <tr> <td>5~10</td> <td>±0.15</td> <td>±2°</td> <td></td> </tr> <tr> <td>~5</td> <td>±0.10</td> <td>DRAWING NO.</td> <td>SHEET 1 OF 1</td> </tr> </table>						② Terminal	6	Phosphor bronze	Au Plating	① Housing	1	Nylon	Black	ITEM PART NAME	TER'NO. QTY.	MATERIAL	FINISHING	APPROVALS		DATE	REMARK	DRAWN J.X.Zhang		2013/11/11		CHECKED		TITLE: PHONE JACKES		APPROVALS		PART NO. PJ-258		TOLERANCES ARE		SCALE: 1:1	PROJ-4	10~30	±0.30	ANGLE		5~10	±0.15	±2°		~5	±0.10	DRAWING NO.	SHEET 1 OF 1
② Terminal	6	Phosphor bronze	Au Plating																																														
① Housing	1	Nylon	Black																																														
ITEM PART NAME	TER'NO. QTY.	MATERIAL	FINISHING																																														
APPROVALS		DATE	REMARK																																														
DRAWN J.X.Zhang		2013/11/11																																															
CHECKED		TITLE: PHONE JACKES																																															
APPROVALS		PART NO. PJ-258																																															
TOLERANCES ARE		SCALE: 1:1	PROJ-4																																														
10~30	±0.30	ANGLE																																															
5~10	±0.15	±2°																																															
~5	±0.10	DRAWING NO.	SHEET 1 OF 1																																														

AKHRO
 ELECTRONICS CO.,LTD