
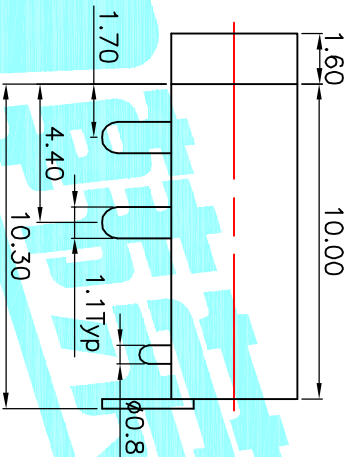


P.C.B Layout (copper-sided view)

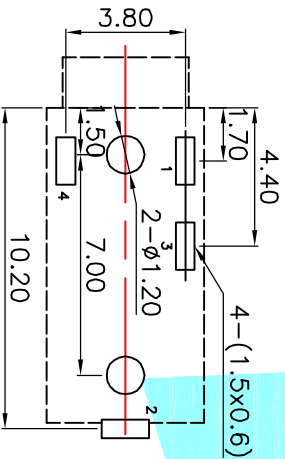

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature: -20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

Model NO	PJ-2110-A	PJ-2110-B
Schematic		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

② Terminal		4	Phosphor bronze	Au Plating		
① Housing		1	Nylon	Black		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11				
CHECKED						
APPROVALS						
TOLERANCES ARE		30~0.3	±0.30	ANGLE		
	10~30	±0.20		UNIT: mm	PART NO. PJ-2110	
	5~10	±0.15	±2'	SCALE: 1:1	TITLE: PHONE JACKES	
	~5	±0.10		DRAWING NO.	PROJ-4	
DRAWN DATE TITLE: PHONE JACKES						
ELECTRONICS CO.,LTD						
SHEET 1 OF 1						