
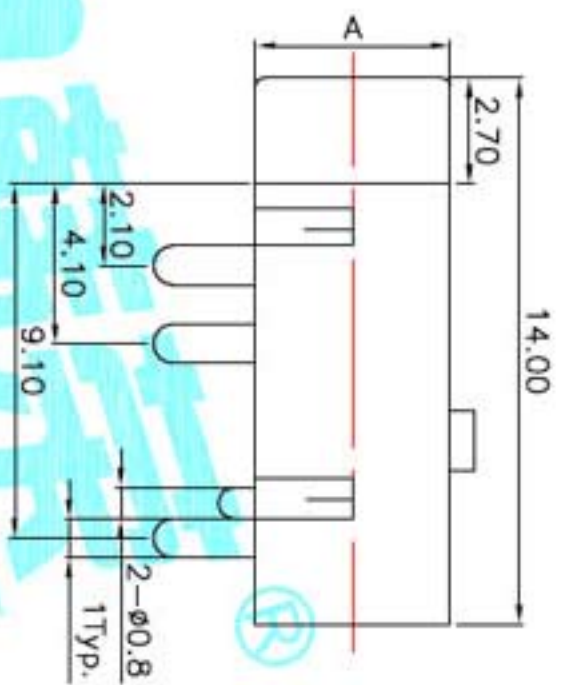


P.C.B LAYOUT(copper-sided view)

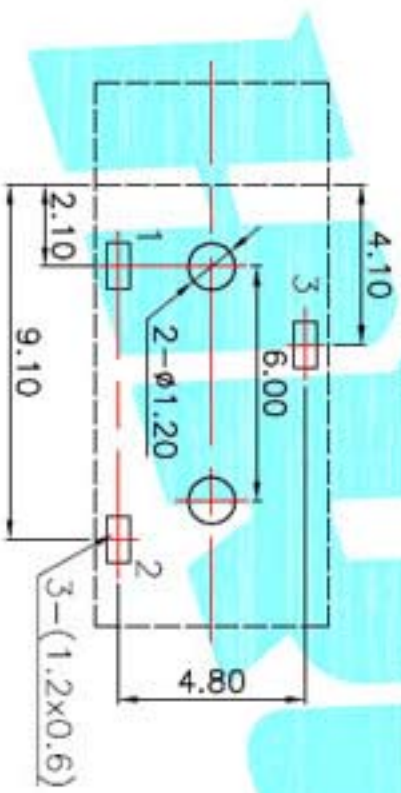

A=φ5.0	1
A=φ5.6	2
A=φ6.0	3
Schematic	

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

ECN NO.	REV.	DATE	DESCRIPTION	CHANGE.	CHECK.	APPRO.
	A		NEW			

② Terminal	3	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		TITLE: PHONE JACKETS		
DRAWN		2013/11/11		ELECTRONICS CO.,LTD		
CHECKED				PU-3200		
APPROVALS				PART NO.		
TOLERANCES ARE		30±0.1	±0.30	ANGLE		
		10-20	±0.20	UNIT: mm	SCALE: 1:1	PROJ.
		5-10	±0.15	±2'	DRAWING NO.	SHEET 1 OF 1
		5	±0.10			