ROHS

http://www.okhro.com

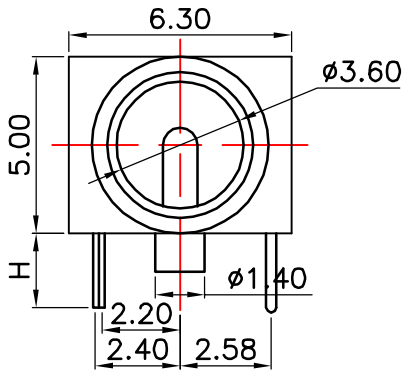

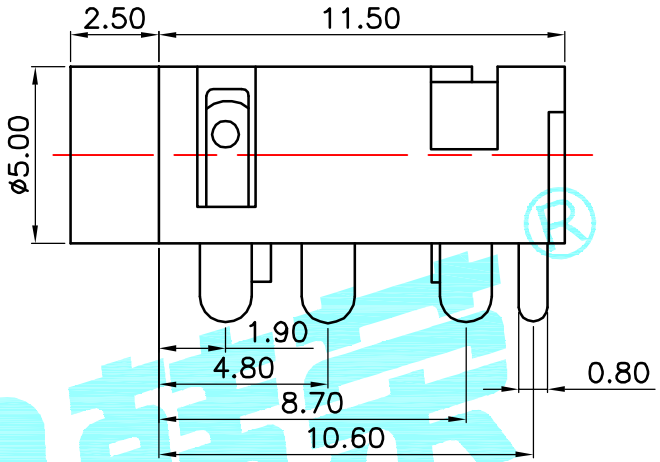

P.C.B LAYOUT(copper-sided view)

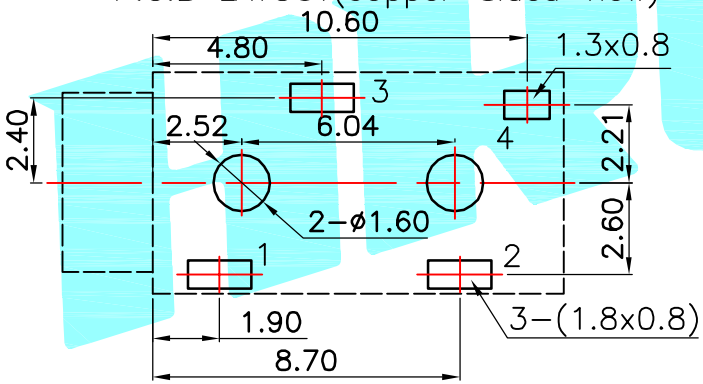

H=0.9	PJ-3270-A	PJ-3270-B	PJ-3270-C
H=1.6	PJ-3270-D	PJ-3270-E	PJ-3270-F
H=2.1	PJ-3270-G	PJ-3270-H	PJ-3270-I
H=2.8	PJ-3270-J	PJ-3270-K	PJ-3270-L
Schematic			

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

②	Terminal	——	4	Phosphor bronze	Au Plating	——
①	Housing	——	1	Nylon	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	HRO韩荣® ELECTRONICS CO.,LTD		
DRAWN	J.X.Zhang	2013/11/11			
CHECKED			TITLE:	PHONE JACKES	
APPROVALS			PART NO.	PJ-3270	
TOLERANCES ARE	30~以下 ±0.30 / 10~30 ±0.20 / 5~10 ±0.15 / ~5 ±0.10	ANGLE ±2°	UNIT: mm	SCALE: 1:1	PROJ:
			DRAWING NO.	——	SHEET 1 OF 1

——	A	——	NEW	——	——	——
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.