


P.C.B LAYOUT(copper-sided view)

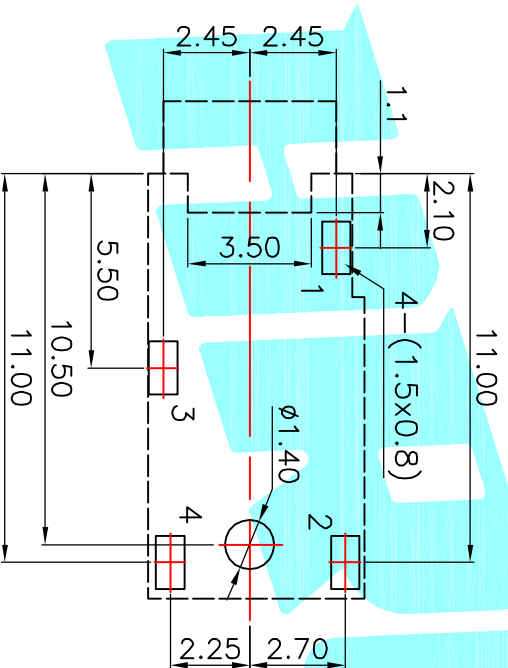

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature: -20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

|           |           |           |
|-----------|-----------|-----------|
| Model No. | PJ-3810-A | PJ-3810-B |
| Schematic |           |           |

|                |           |                     |              |                     |             |              |
|----------------|-----------|---------------------|--------------|---------------------|-------------|--------------|
| ② Terminal     | 4         | Phosphor bronze     | Au Plating   |                     |             |              |
| ① Housing      | 1         | Nylon               | Black        |                     |             |              |
| ITEM           | PART NAME | TERN.O.             | QTY.         | MATERIAL            | FINISHING   | REMARK       |
| APPROVALS      |           | DATE                |              |                     |             |              |
| DRAWN          | J.X.Zhang | 2013/11/11          |              | ELECTRONICS CO.,LTD |             |              |
| CHECKED        |           |                     |              | TITLE: PHONE JACKS  |             |              |
| APPROVALS      |           |                     |              | PART NO. PJ-3810    |             |              |
| TOLERANCES ARE |           | 30 <sup>±0.15</sup> | ±0.30        | ANGLE               | UNIT: mm    | SCALE: 1:1   |
|                |           | 10 <sup>±0.10</sup> | ±0.20        |                     |             | PROJ.        |
|                |           | 5 <sup>±0.10</sup>  | ±0.15        | ±Z                  | DRAWING NO. | SHEET 1 OF 1 |
| ECN NO.        | REV.      | DATE.               | DESCRIPTION. | CHANGE.             | CHECK.      | APPRO.       |
|                | A         |                     | NEW          |                     |             |              |