
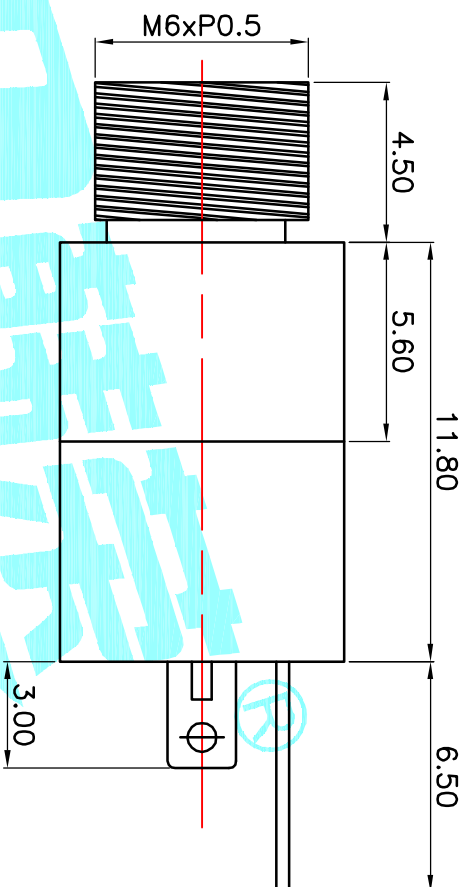


P.C.B LAYOUT(copper-sided view)

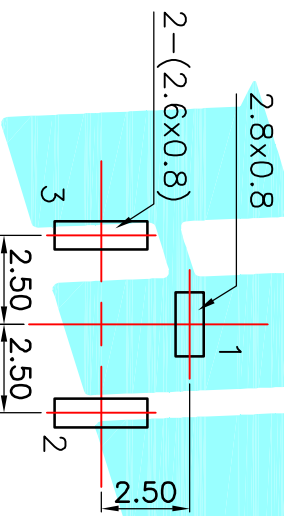

Rating:0.5A 30V DC
 Contact Resistance:100 m Ω Max.
 Operating temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C
 Operating force:3-20N
 Operating Life:5,000cycles

Model No.	PJ-3920
Schematic	

② Terminal	—	3	Phosphor bronze	Au Plating		
① Housing	—	1	Nylon	Black		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS						
DRAWN	J.X.Zhang	DATE	2013/11/11	ELECTRONICS CO.,LTD		
CHECKED		TITLE:		PHONE JACKS		
APPROVALS		PART NO.		PJ-3920		

TOLERANCES ARE		30 $^{+0.1}$	±0.30	ANGLE	UNT:	SCALE:	PROJ:
10-30	5-10	±0.20	±0.15	±2'	mm	1:1	PH
~ 5	±0.10						1 OF 1

ECN NO.	REV.	DATE	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			