


P C B Layout(copper-sided view)

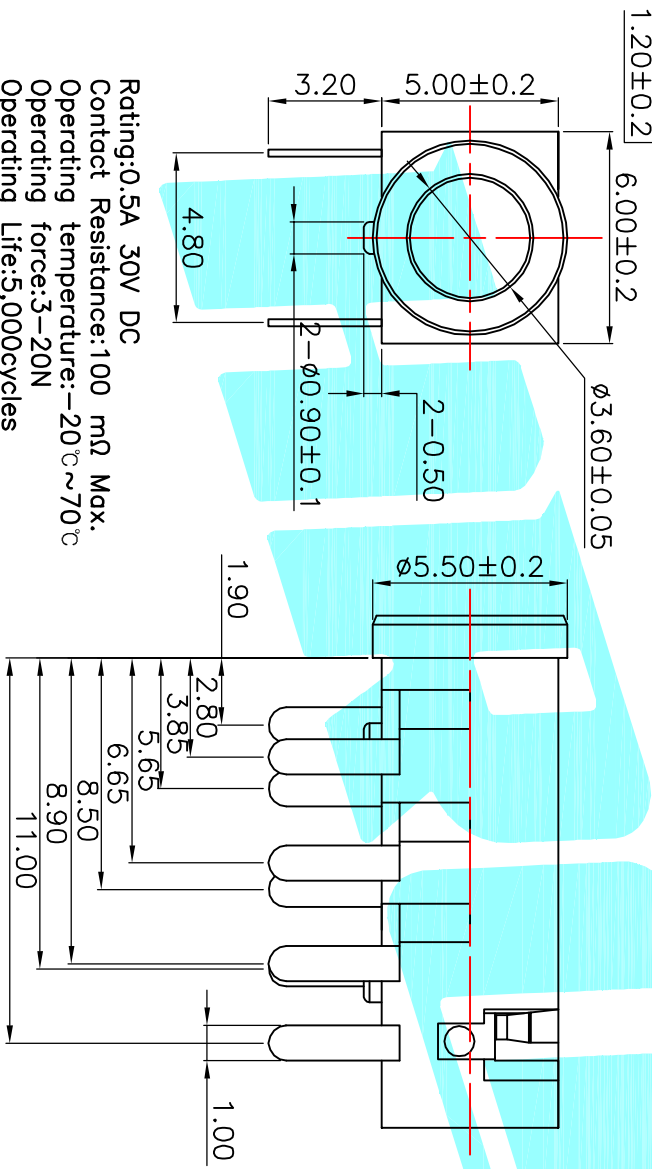

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

8-(1.4X0.5)

Model No.	PJ-3930-A	PJ-3930-B	PJ-3930-C
Schematic			
PJ-3930-D			
PJ-3930-G			
PJ-3930-J			
PJ-3930-M			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
DRAWN J.X.Zhang 2013/6/22 CHECKED APPROVALS TOLERANCES ARE 30%以上 ±0.30 ANGLE 10~30 ±0.20 5~10 ±0.15 ±Z ~5 ±0.10						
TITLE: PHONE JACKS			PART NO. PJ-3930			
DRAWN J.X.Zhang 2013/6/22			ELECTRONICS CO.,LTD			
CHECKED			MATERIAL Nylon Au Plating			
APPROVALS			FINISHING Black			
DATE			REMARK			
DRAWN J.X.Zhang 2013/6/22			SCALE: 1:1			
CHECKED			PROJ. SHEET 1 OF 1			