
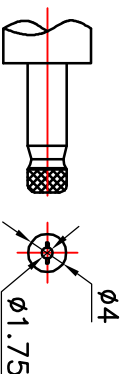


P.C.B LAYOUT(Copper-side view)

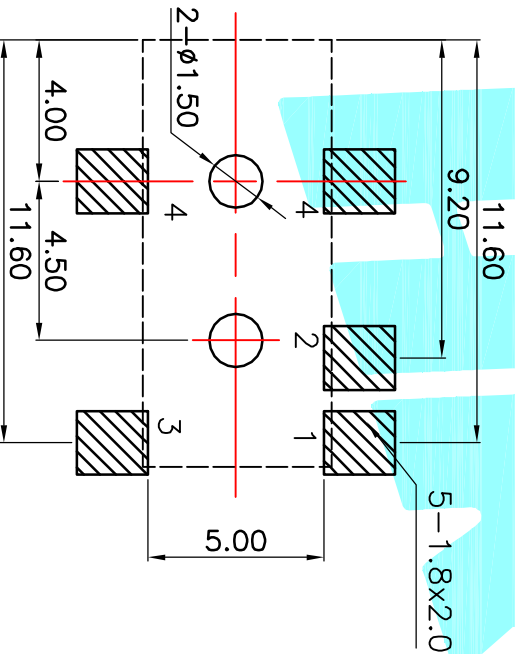

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

②	Terminal	5	Phosphor bronze	Au Plating	
①	Housing	1	Nylon	Black	
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING
APPROVALS		DATE			

DRAWN J.X.Zhang 2013/11/11

TITLE: PHONE JACKES



CHECKED

PART NO. DC-098

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE			30 ^{±0.15}	±0.30	ANGLE	
			10 ^{±0.30}	±0.20	UNIT: mm	SCALE: 1:1
			5 ^{±0.10}	±0.15	±Z'	DRAWING NO.
			~ 5	±0.10		PROJ. SHEET 1 OF 1