
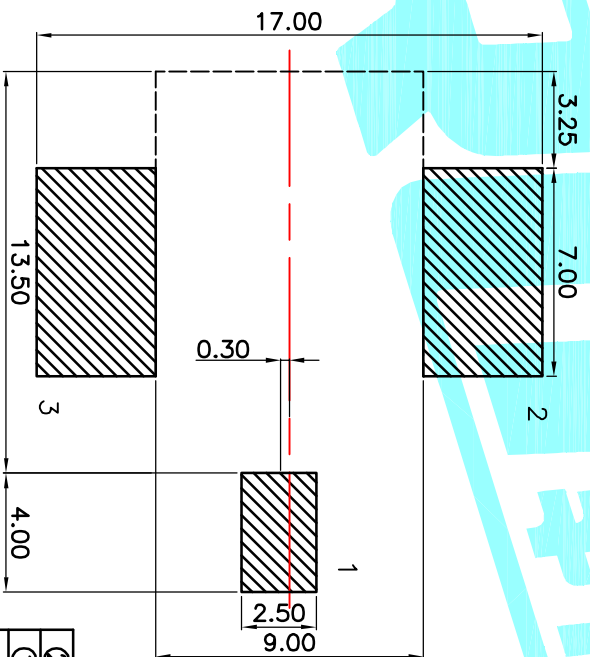


P.C.B LAYOUT(Copper-side view)

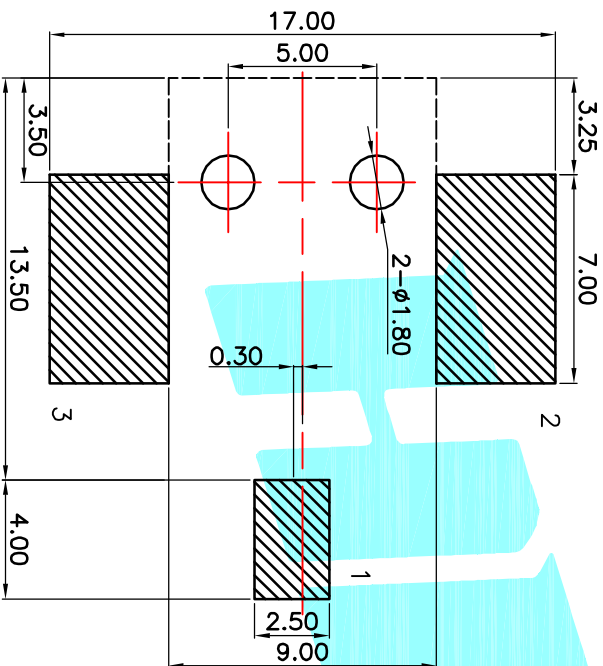

DC-088B-A	DC-088B-B
DC-088C-A	DC-088C-B

Model No.	1	2
PIN	φ2.0	φ2.5

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3~20N
 Operating Life:5,000cycles

② Terminal	3	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11	ELECTRONICS CO.,LTD			
CHECKED			PHONE JACKES			
APPROVALS			PART NO.	DC-088B		
TOLERANCES ARE		30 ^{±0.15}	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10 ^{±0.10}	±0.20			
		5 ^{±0.10}	±0.15	±Z	DRAWING NO.	PROJ.
		~ 5	±0.10			SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			