
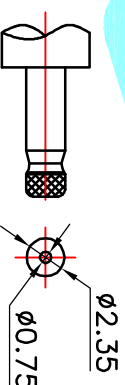


P.C.B LAYOUT(Copper—side view)

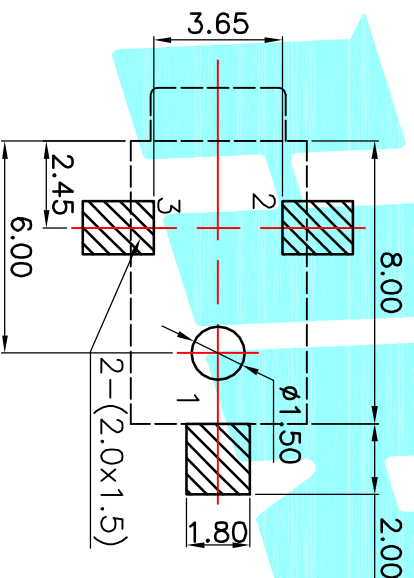

DC MATE PLUG

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:−20℃~70℃
 Operating force:3~20N
 Operating Life:5,000cycles

②	Terminal	—	3	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS				DATE		
DRAWN	J.X.Zhang	2013/11/11		ELECTRONICS CO.,LTD		
CHECKED				TITLE: PHONE JACKES		
APPROVALS				PART NO. DC-0555		
TOLERANCES ARE		30 [±] 0.15	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10 [±] 0.20	±0.20			PROJ.
		5 [±] 0.10	±0.15	±Z	DRAWING NO.	SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			
			CHANGE.			
			CHECK.			
			APPRO.			