
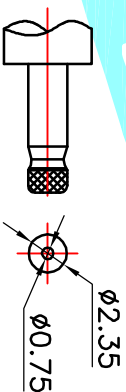


P.C.B LAYOUT(Copper-side view)
10.80

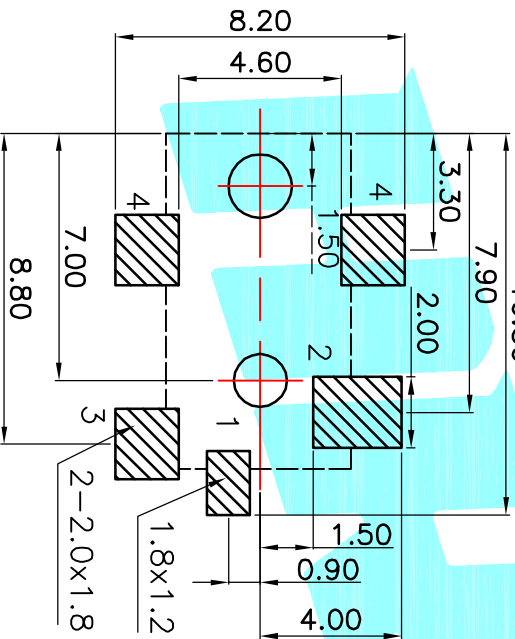

DC MATE PLUG

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

② Terminal	5	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11		ELECTRONICS CO.,LTD		
CHECKED		TITLE:		PHONE JACKS		
APPROVALS		PART NO.		DC-041		
TOLERANCES ARE		30 [±] 以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
	10~30	±0.20				PROJ.
	5~10	±0.15				SHEET 1 OF 1
	~5	±0.10		±2'	DRAWING NO.	
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			