
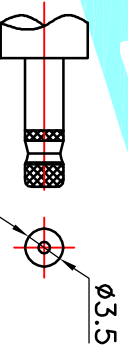


P.C.B LAYOUT(Copper-side view)

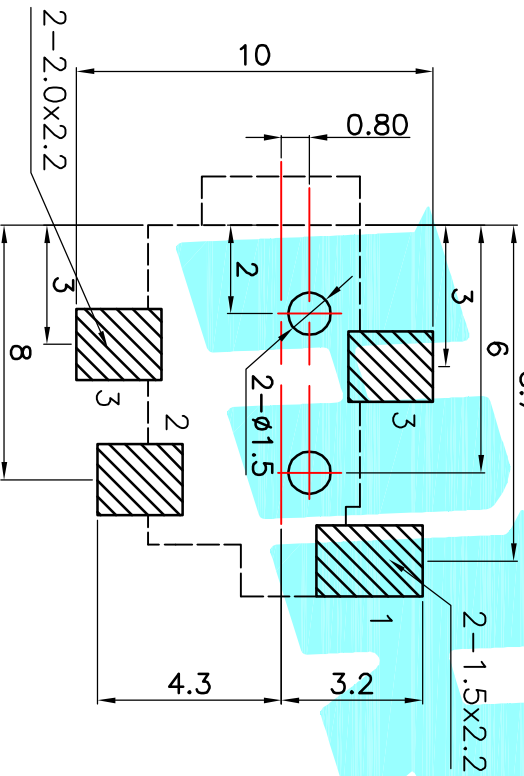

DC MATE PLUG

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:~20℃~70℃  
 Operating force:3~20N  
 Operating Life:5,000cycles

②	Terminal	—	4	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS				DATE		
DRAWN	J.X.Zhang	2013/11/11		ELECTRONICS CO.,LTD		

**HRONICS**  
 ELECTRONICS CO.,LTD

CHECKED		TITLE:		PART NO.		SCALE:		PROJ. SHEET		
APPROVALS		PHONE JACKES		DC-031A		1:1		1 OF 1		
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.				
	A		NEW							